

# Liquitainer<sup>®</sup>/Firetainer<sup>®</sup>



Where space is at a premium, the **Liquitainer<sup>®</sup> / Firetainer<sup>®</sup> tank is an ideal solution for bulk water storage indoors or out.** A wide range of shapes and any length or width can be catered for, with a maximum height of 5.35m in galvanised and aluminium.

Using steel sections of either rectangular, circular or u-beams, a structure is formed which eliminates the need for internal bracing. Galvanised steel or aluminium panels are bolted between the sections and the interior is fitted with an open top tailored membrane liner. Alternative covers are available either flat with a raised ball valve housing for indoor use, or with a low profile pitch for outdoor use.

Liquitainer<sup>®</sup>/Firetainer<sup>®</sup> tanks can be located on any suitable flat load bearing surface, such as an existing reinforced concrete floor, or roof top, and are simply bolted to the floor surface.

Firetainer<sup>®</sup> tanks are approved by the UK Loss Prevention Certification Board for the storage of fire sprinkler water.

**Versatility in design.** A variety of shapes and sizes can be supplied. Existing obstructions such as building support columns can be encapsulated within the tank by 'sleeving' the membrane liner around them.

**Ease and speed of assembly.** No sealants are used in the construction of the tank. All that is required is straightforward site assembly.

**Simplicity of foundations.** There is no need to seal the tank to the concrete foundation. The membrane liner has a floor in it and the tank shell is simply bolted to the foundation.

**Low maintenance.** The outer steel work structure is hot dip galvanised to BS EN ISO 1461 (2009) and the shell panels are manufactured from either a pre-galvanised steel sheet coated with a heavy duty spangle finish complying to BS EN 10346 Grade S250GD + Z600-M or a marine grade aluminium alloy to BS EN AW 5083 H22. Internally the membrane liner separates the stored water from the tank shell, thereby reducing the potential for corrosion. The membrane liner itself will not rot or degrade in the same way that other coatings and finishes do, under normal water storage conditions.



LPS 1276 Cert/LPCB ref. 037c

# Liquitainer®/Firetainer® Technical Data

## Capacities & Dimensions


	Aluminium	Galvanised Steel
Capacity*	10m <sup>3</sup> to 1,300m <sup>3</sup>	10m <sup>3</sup> to 1,300m <sup>3</sup>
Length & Width	2.79m increasing in increments of 1.00m options & 1.25m. Max width 12.79m	2.79m increasing in increments of 1.00m options & 1.25m. Max width 12.79m
Height	1.25m to 5.35m max	1.25m to 5.35m max
*Note	Larger capacities available  1,300m <sup>3</sup> is max capacity for UK LPCB approval	

**Ancillaries/Accessories** A wide range of extra equipment and fittings are available, including:-  
Ball float valves, high and low level switches, internal ladders and sump liners.

Standard accessories include:-  
Immersion heater (where situated outdoors), anti-vortex device, contents gauge, external ladder and landing, WRc Type 'AB' airgap.

**Foundations** All that is required is a flat load bearing slab. Level tolerance +/- 6.0mm across slab.  
Calculation of tank loading (full) is by multiplying the rim height by 9.81 = kN/m<sup>2</sup>

## Typical layout of Liquitainer/Firetainer

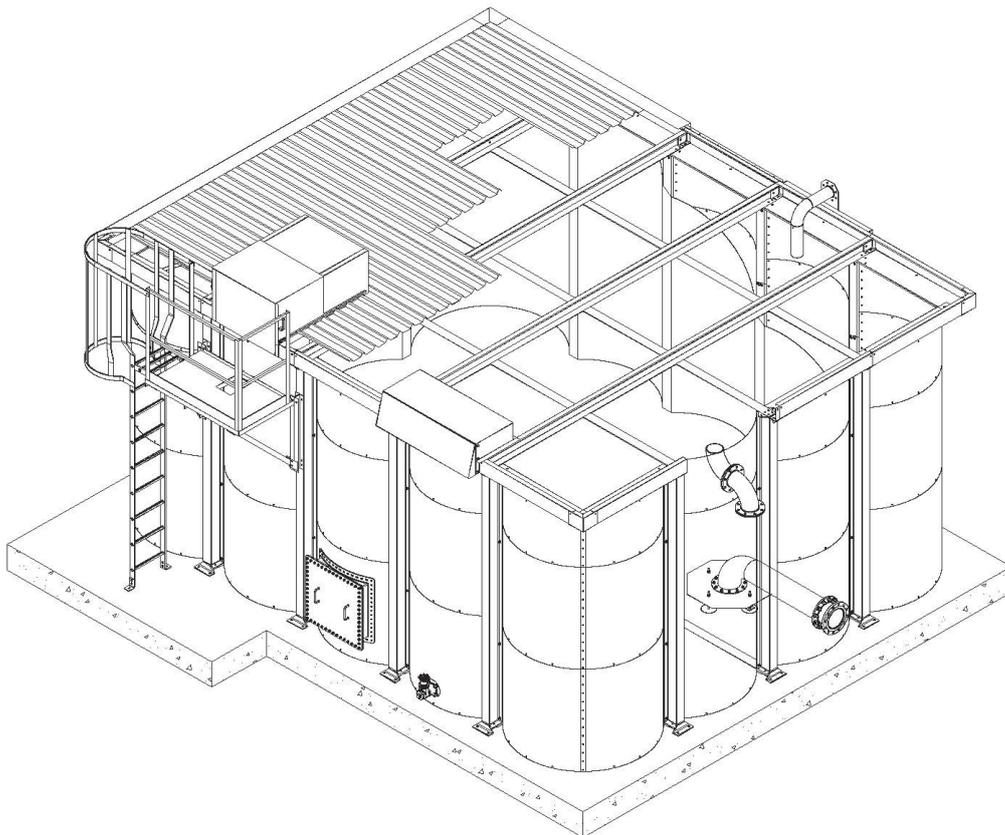

**Franklin Hodge Industries Ltd**  
Jubilee Building, Westfields Trading Estate  
Faraday Road, Hereford HR4 9NS  
Telephone: +44 (0) 1432 269605  
Fax: +44 (0) 1432 277454  
Web: www.franklinhodge.com